

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 898 223 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
24.02.1999 Bulletin 1999/08

(51) Int Cl.⁶ G06F 3/147

(21) Application number: 98306391.8

(22) Date of filing: 11.08.1998

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Narayanaswamy, Shankar
Sunnyvale, California 94086 (US)
• Rosenthal, Eugene J.
Edison, New Jersey 08817 (US)

(30) Priority: 20.08.1997 US 915816

(74) Representative: Johnston, Kenneth Graham et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 OTU (GB)


(71) Applicant: LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(54) Multi-display electronic devices having open and closed configurations

(57) A portable or other electronic device has two or more display devices or screens that can be used to display different subsets of image signals. The effect is that the device simulates the display capabilities of devices having much larger screens. The device has an open or active configuration, in which the multiple screens are available for displaying image signals, and a closed or

inactive configuration, in which some or all of the multiple screens are folded together or otherwise stowed away to reduce the size of the device for storage and/or carrying. By simulating large-display operations, electronic devices according to the present invention are capable of presenting more useable information to the user than is otherwise possible using prior art devices having a single small screen.

FIG. 5

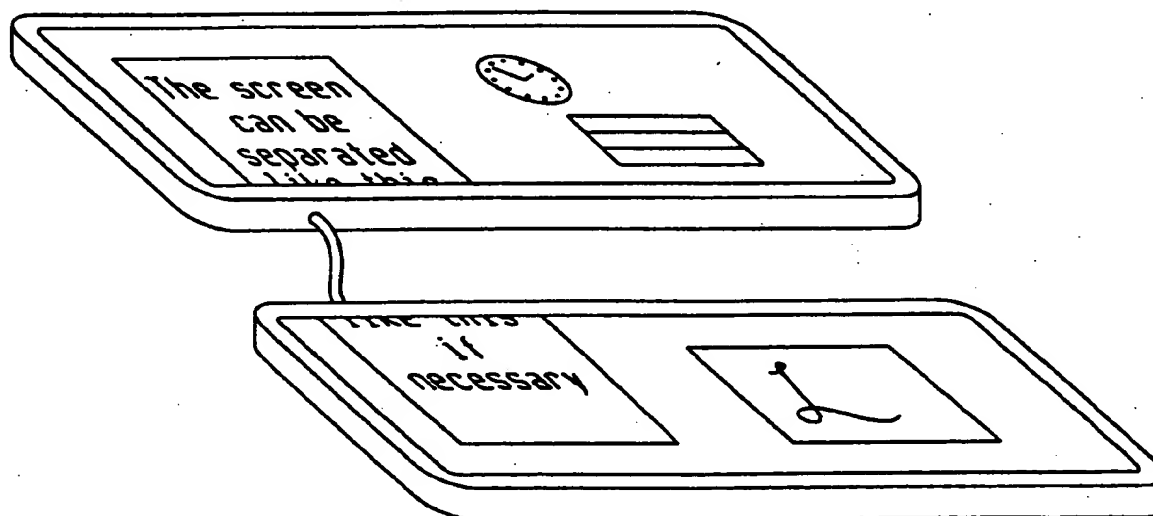

Description

Field of the Invention

[0001] The present invention relates to portable and other electronic devices having displays, such as monitors or screens, for the display of text, graphics, and/or video images.

Description of the Related Art

[0002] One of the drawbacks to portable electronic devices, such as personal digital assistants, cellular telephones, internet access devices, palmtop computers, and even some laptop computers, is that the displays are of limited size. These small displays limit the type of applications that can be run effectively on such devices and/or detract from the quality of the images displayed by such applications. For example, it may be impractical to run software that relies on a graphical user interface (GUI) on a portable device, because the elements of the GUI on the small screen of the portable device will be too small to be adequately visible.

Summary of the Invention

[0003] The present invention is directed to a portable or other electronic device having two or more display devices or screens that can be used to display different subsets of image signals. The effect is that the device simulates the display capabilities of devices having much larger screens. The device has (1) an open or active configuration in which each display device is deployed for displaying a different subset of the image signals and (2) a closed or inactive configuration in which one or more of the display devices are stowed away and unavailable for displaying image signals. Stowing the display devices away, which reduces the size, e.g., footprint, of the device for storage and/or carrying, means folding them together or otherwise making one or more of them unavailable to display image signals for viewing by the user. By simulating large-display operations, electronic devices according to the present invention are capable of presenting more useable information to the user than is otherwise possible using prior art devices having a single small screen.

Brief Description of the Drawings

[0004]

Figs. 1(a) and 1(b) show perspective views of a portable electronic device that functions as a combined cellular phone / personal digital assistant, according to one embodiment of the present invention;

Fig. 1(c) shows a perspective view of a portable electronic device in the open configuration, accord-

ing to an alternative embodiment of the present invention;

Fig. 2 shows a block diagram of an electronic device, according to one implementation of the present invention;

Fig. 3 shows a block diagram of an electronic device 300, according to an alternative implementation of the present invention;

Figs. 4-6 shows portable electronic devices, according to possible embodiments of the present invention.

Detailed Description

[0005] The present invention is directed to portable and other electronic devices that have two or more display devices, e.g., screens, where each display device is adapted to display different subsets of image signals generated by an image generator and distributed to the display devices by one or more display drivers. The electronic devices have a closed configuration in which one or more of the displays are, for example, stowed away, e.g., folded together, to facilitate the portability and/or storage of the electronic device.

[0006] A display driver is a component that provides an interface between an image generator and a display device, whereby the display driver receives image signals or image generation commands from the image generator and, if necessary, processes those signals/commands to generate the signals for display by the display device. This processing may include such image processing functions as color format transformations and image scaling. A display driver may be implemented in any suitable combination of hardware and software.

[0007] Figs. 1(a) and 1(b) show perspective views of a portable electronic device 100 that functions as a combined cellular phone / personal digital assistant, according to one embodiment of the present invention. Fig. 1(a) shows device 100 in its closed configuration, while Fig. 1(b) shows device 100 in a partially open configuration.

[0008] Device 100 has three distinct displays 102, 104, and 106. Display 102 displays images when device 100 is in its closed configuration in which device 100 operates as a cellular phone. In this configuration, display 102 is able to display conventional text and/or graphical images associated with sending and receiving telephone calls using a cellular phone.

[0009] Displays 104 and 106 display images when device 100 is in its open configuration in which device 100 operates as a personal digital assistant (PDA). According to one embodiment of the present invention, each of displays 104 and 106 displays part, e.g., half, of each PDA image. In the open configuration, displays 104 and 106 are positioned next to each other and display drivers in device 100 divide images for display on the two displays. The image thus displayed overflows from one display to the other, giving the appearance of a single large

display displaying the full image. The multiple small displays combine to simulate the operations of a single large display. As such, device 100 is able to present concurrently more useable information to the user than would otherwise be available to a user of a conventional PDA that had a single small display.

[0010] Displays 104 and 106 may be any suitable type of display device, including liquid crystal displays (LCDs). In device 100, a hinge or other similar mechanism may be used to keep the displays together when used in the open, e.g., active, configuration or the closed, e.g., inactive, configuration. A locking mechanism can be used to keep the combined structure rigid when the screens are unfolded. As shown in Fig. 1(b), the different displays need not be co-planar in order for the device to be used in the active configuration.

[0011] Device 100 has two flat-panel displays 104 and 106 which may be less than 5mm thick without a backlight. When the device is in its inactive configuration, the two sides are folded together. For example, if a 5"x5" display area is implemented using two 5"x2.5" displays, the two displays are stored flat against each other. The inactive area is therefore only half of the active area, resulting in a more compact configuration for carrying and/or storing the device.

[0012] Fig. 1(c) shows a perspective view of a portable electronic device in the open configuration, according to an alternative embodiment of the present invention. According to this embodiment, display 102 of Fig. 1(a) and display 104' of Fig. 1(c) are positioned back-to-back within the top half of the device. In one implementation of this embodiment, the device has backlighting means located behind display 106', and displays 106' and 104' are transparent. For such an implementation, the backlighting means behind display 106' will illuminate display 102 when the device is in the closed configuration as shown in Fig. 1(a). In this way, a thinner device with backlighting can be achieved. Furthermore, in certain embodiments, display 102 of Fig. 1(a) and display 104' of Fig. 1(c) may be implemented as a single display device that is adapted to generate images for both the open and closed configurations and possibly at the same time.

[0013] Fig. 2 shows a block diagram of an electronic device 200, according to one implementation of the present invention. For example, electronic device 200 may be modified as needed to implement device 100 of Figs. 1(a)-(b). Device 200 has two or more display devices that may be used to display different sets of image signals to create the effect of a larger display.

[0014] In particular, image generator 206 generates image signals for display on display devices 210. The image signals may comprise any conventional type of image signals, including text, video, graphics, or any combination thereof. Display driver 208 receives the image signals from image generator 206 and distributes appropriate subsets of image signals to the various display devices 210 for display. Each display device 210

operates as a distinct image display device. The effect however of all of the display devices 210 operating together under the control of display driver 208 is the simulation of a larger display device displaying all of the image signals generated by image generator 206. Image generator 206 and display driver 208 may be implemented on a single processor, either in hardware, in software, or in a combination of both hardware and software.

[0015] Electronic device 200 also has optional local input device 202 and optional remote input device 204. Local input device 202 may be any suitable device that enables a user to enter information into device 200, such as a keyboard, a keypad, a stylus for a touch screen, a thumb wheel for scrolling, or a track pad. This information is received by image generator 206 for appropriate updating of the image signals to be displayed. Remote input device 204 may be an antenna, network, or cable port, or other suitable type of interface for receiving information from a remote source. This information is also received by image generator 206 for the update of the images to be displayed. In particular implementations, one or more of the display devices may be touch sensitive to operate as additional input devices of device 200 for the input of user-selected information to be fed back to image generator 206.

[0016] Fig. 3 shows a block diagram of an electronic device 300, according to an alternative implementation of the present invention. Electronic device 300 is analogous to electronic device 200 of Fig. 2, except that each display device 210 in device 300 has its own display driver 308 to control the display of subsets of image signals. Image generator 306 and display drivers 308 may be implemented on a single processor, either in hardware, in software, or in a combination of both hardware and software.

[0017] Depending on the implementation, the function of dividing image signals into subsets for display on the various display devices may be performed by either the image generator or the one or more display drivers. Even in device 300 of Fig. 3, where each display driver 308 interfaces with only a single display device, image generator 306 could generate and store the image signals into memory, and each display driver 308 could know which subset of those image signals to retrieve from memory. In any case, the image signals are divided into subsets based on the portions of each image displayed by the various display devices. For example, in the embodiment of Fig. 4, where the display devices display the top and bottom halves of each image, respectively, the image signals are divided into two subsets accordingly. Similarly, in the embodiment of Fig. 6, where the display devices display the top half, lower left quarter, and lower right quarter of each image, respectively, the image signals are divided into three subsets accordingly.

[0018] Figs. 4-6 shows portable electronic devices, according to possible embodiments of the present in-

vention. In Fig. 4, the portable electronic device has two displays that are shown in the full open configuration. In Fig. 5, the portable electronic device is shown configured with its two displays separated.

[0019] In Fig. 6, the portable electronic device has three separable displays. As mentioned above, in some implementations of the present invention, one or more of the display devices may operate as touch-type input devices. In these implementations, parts of one or more of the display devices could be used as a soft keyboard in which a keyboard is displayed on the screen and the user "types" by touching the screen at the appropriate locations. The touch membrane detects the locations where the user types and infers which characters are being typed. In one embodiment of the present invention, one of the multiple display devices may be a touch-type device that provides the soft keyboard. In an alternative embodiment, two such display devices may be used: one providing the left-hand portion of the soft keyboard and the other providing the right-hand portion of the soft keyboard. These display devices may be able to be positioned in different orientations, as selected by the user. Moreover, the display devices may be able to be physically separated from one another, as shown in Fig. 6. For example, in the application as a soft keyboard, the left- and right-hand touch screens may be separated to suit the user's ergonomic preferences. These touch screens may be stowed away when the electronic device is in the closed configuration.

[0020] In some embodiments of the present invention, the electronic devices support an alternative mode of operation in which two or more of the multiple displays can operate as distinct displays that display different images rather than different parts of the same images.

[0021] Although the present invention is particularly suitable for portable electronic devices, such as personal digital assistants, cellular telephones, internet access devices, palmtop computers, and laptop computers, those skilled in the art will understand that the present invention may be applied to other types of electronic devices as well, including stationary computer terminals.

[0022] It will be further understood that various changes in the details, materials, and arrangements of the parts which have been described and illustrated in order to explain the nature of this invention may be made by those skilled in the art without departing from the principle and scope of the invention as expressed in the following claims.

Claims

1. An electronic device comprising:

- (a) an image generator adapted to generate image signals;
- (b) one or more display drivers, connected to the image generator and adapted to receive the

image signals from the image generator; and
(c) two or more distinct display devices, connected to the one or more display drivers, wherein the electronic device has (1) an open configuration in which each display device is deployed for displaying a different subset of the image signals and (2) a closed configuration in which one or more of the display devices are stowed away and unavailable for displaying image signals.

2. A method for processing image signals using an electronic device, comprising the steps of:

- (a) generating the image signals; and
- (b) distributing different subsets of the image signals for display on two or more distinct display devices, wherein the electronic device has (1) an open configuration in which each display device is deployed for displaying a different subset of the image signals and (2) a closed configuration in which one or more of the display devices are stowed away and unavailable for displaying image signals.

3. An apparatus for processing image signals using an electronic device, comprising:

- (a) means for generating the image signals; and
- (b) means for distributing different subsets of the image signals for display on two or more distinct display devices, wherein the electronic device has (1) an open configuration in which each display device is deployed for displaying a different subset of the image signals and (2) a closed configuration in which one or more of the display devices are stowed away and unavailable for displaying image signals.

4. The device of claim 1, the method of claim 2 or apparatus of claim 3, wherein the electronic device is a portable electronic device.

5. The device of claim 1, or the method of claim 2, or apparatus of claim 3, wherein the display devices comprise a first touch-type display device adapted to display a left-hand side of a soft keyboard and a second touch-type display device adapted to display a right-hand side of the soft keyboard.

6. The device, method or apparatus of claim 3, wherein the first touch-type display device is separable from the second touch-type display device to allow the user to select relative positions for the left- and right-hand sides of the soft keyboard.

7. The device of claim 1 or the method of claim 2, or

apparatus of claim 3, wherein at least one display device can be used to display images in the closed configuration.

8. The device of claim 1 or the method of claim 2, or apparatus of claim 3, comprising one display driver for each or some or all of the display devices. 5
9. The device of claim 1 or the method of claim 2, or apparatus of claim 3, wherein the image generator and the one or more display drivers are implemented on a single processor. 10
10. The device of claim 1 or the method of claim 2, or apparatus of claim 3, wherein the one or more display drivers are implemented in software, or hardware. 15
11. An electronic device comprising first and second displays oppositely oriented, such that: 20
- when the device is in a closed configuration, the first display is visible to a user and the second display is hidden from view; and
- when the device is in an open configuration, the second display is visible to the user. 25
12. The device of claim 11, further comprising a third display, such that, when the device is in the open configuration, the second and third displays display different subsets of image signals. 30
13. The device of claim 11, wherein the first and second displays are mounted back-to-back and further comprising backlighting means located behind the third display, such that, when the device is in the closed configuration, the backlighting means is adapted to illuminate the first display. 35
14. The device of claim 11, wherein: 40
- when the device is in the open configuration, the device is adapted to operate as a personal digital assistant; and
- when the device is in the closed configuration, the device is adapted to operate as a portable telephone. 45
15. The device of claim 11, wherein the first and second displays are implemented as a single display device adapted to generate images for both the open and closed configurations. 50

55

FIG. 1A

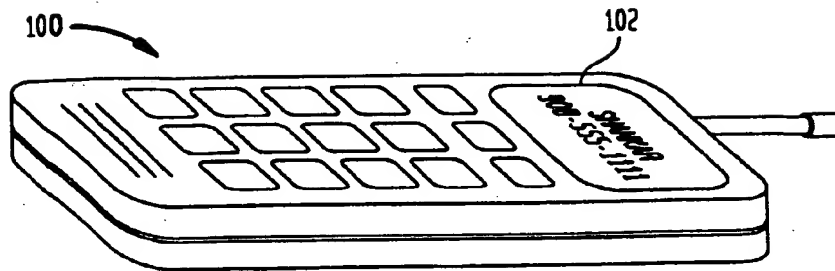


FIG. 1B

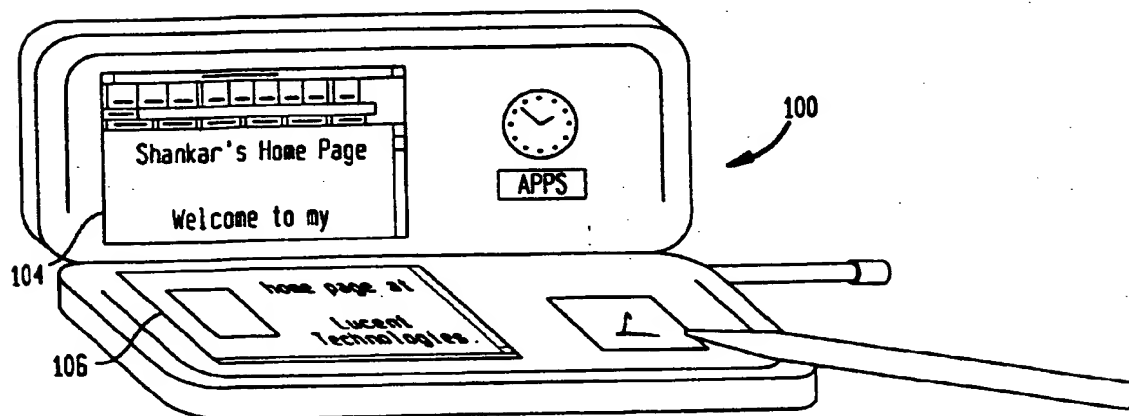


FIG. 1C

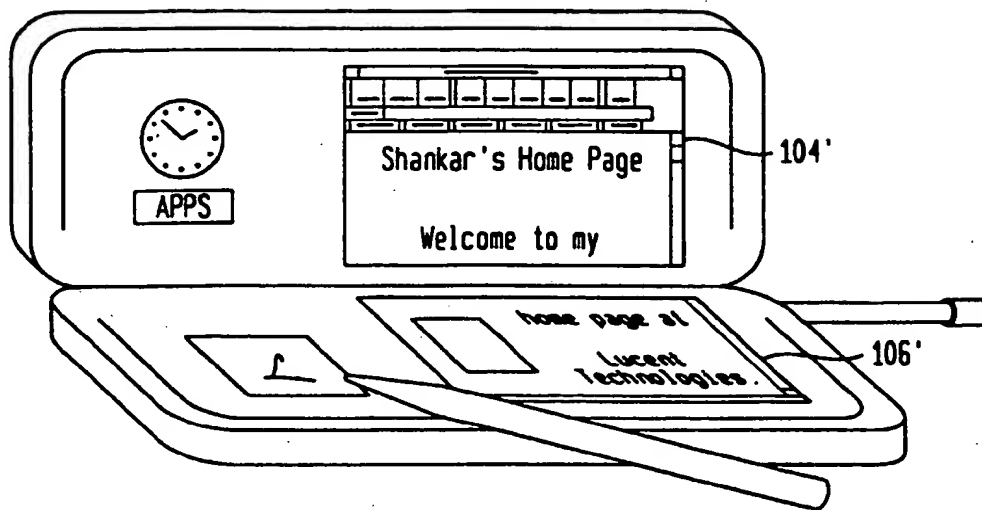


FIG. 2

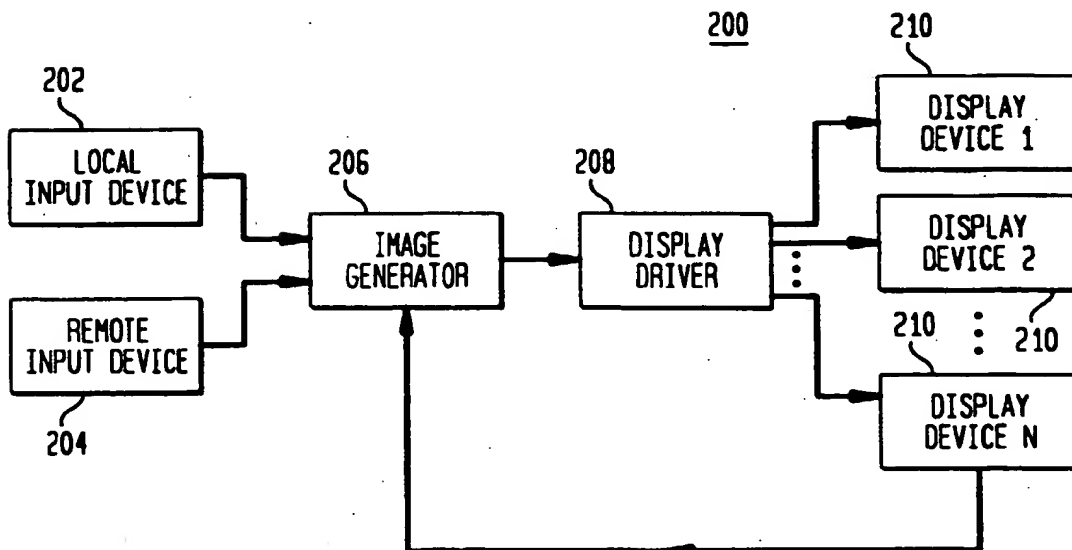


FIG. 3

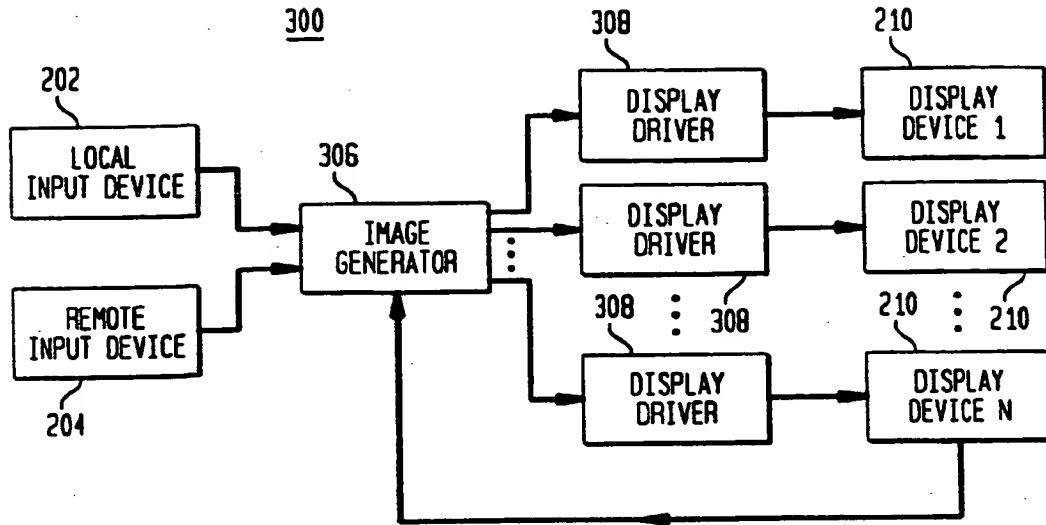


FIG. 4

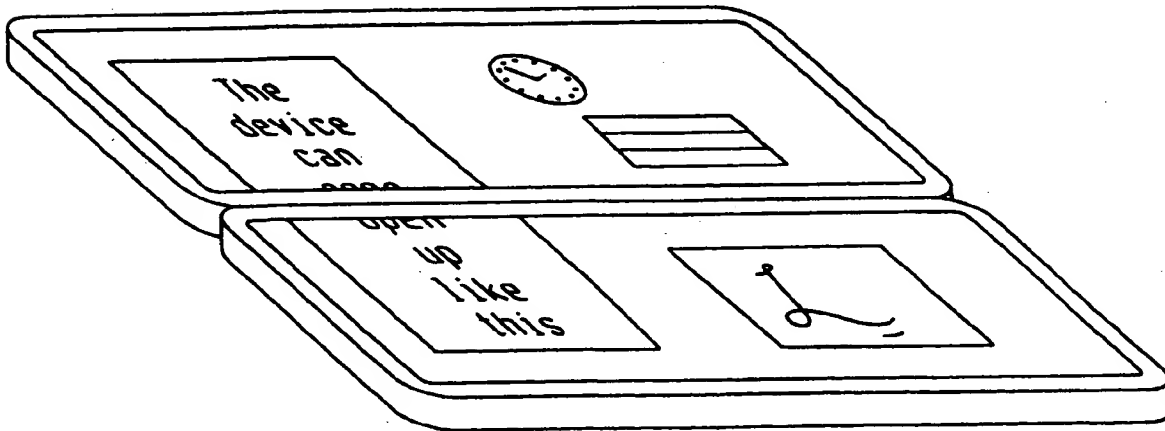


FIG. 5


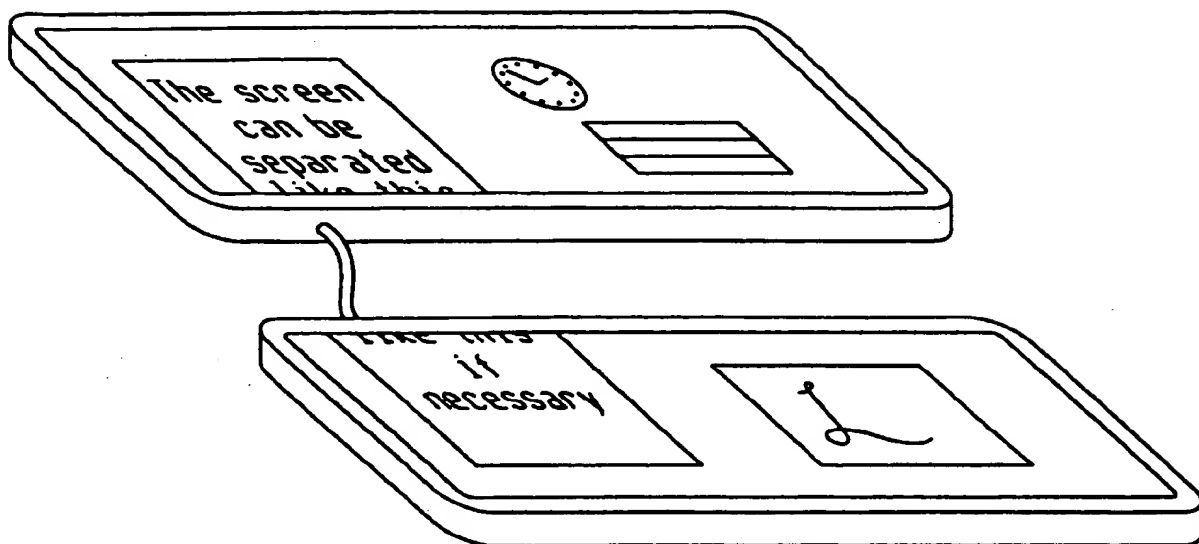


FIG. 6



THIS PAGE BLANK (UBPTO)

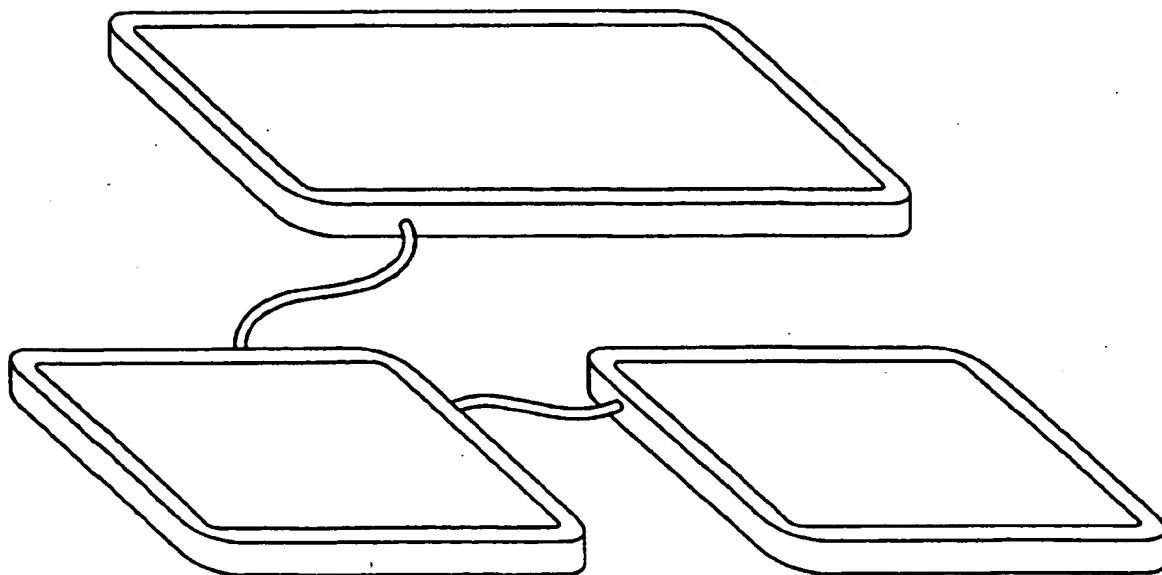

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 898 223 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
17.03.1999 Bulletin 1999/11

(51) Int Cl.⁶: **G06F 3/147**

(43) Date of publication A2:
24.02.1999 Bulletin 1999/08

(21) Application number: 98306391.8

(22) Date of filing: 11.08.1998

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Narayanaswamy, Shankar**
Sunnyvale, California 94086 (US)
• **Rosenthal, Eugene J.**
Edison, New Jersey 08817 (US)

(30) Priority: 20.08.1997 US 915816

(74) Representative: Johnston, Kenneth Graham et al
Lucent Technologies (UK) Ltd,
5 Morningside Road
Woodford Green Essex, IG8 OTU (GB)


(71) Applicant: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(54) Multi-display electronic devices having open and closed configurations

(57) A portable or other electronic device has two or more display devices or screens that can be used to display different subsets of image signals. The effect is that the device simulates the display capabilities of devices having much larger screens. The device has an open or active configuration, in which the multiple screens are available for displaying image signals, and a closed or

inactive configuration, in which some or all of the multiple screens are folded together or otherwise stowed away to reduce the size of the device for storage and/or carrying. By simulating large-display operations, electronic devices according to the present invention are capable of presenting more useable information to the user than is otherwise possible using prior art devices having a single small screen.

FIG. 5

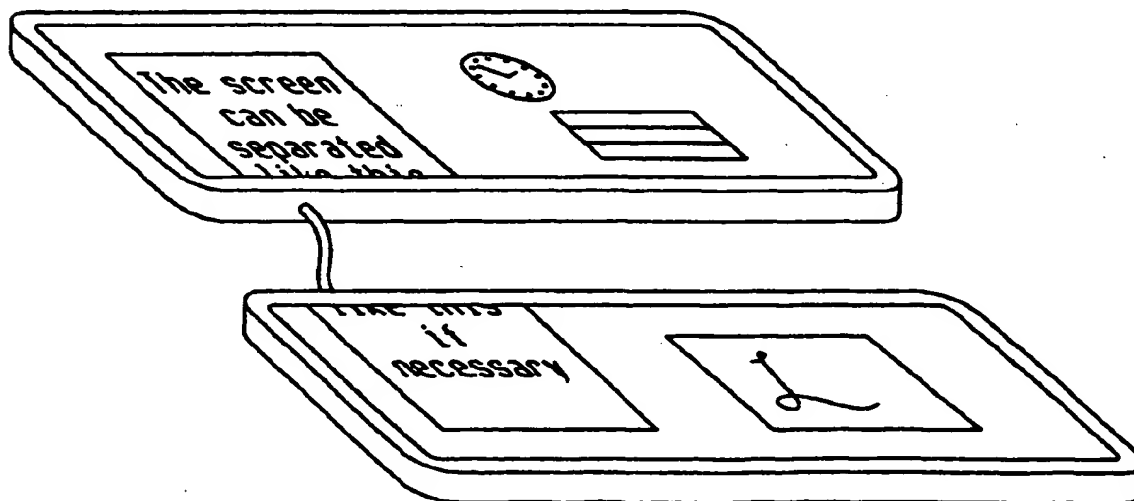



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 6391

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 5 467 102 A (KUNO YOSHINORI ET AL) 14 November 1995 * column 3, line 54 - column 4, line 29 * * column 7, line 32 - line 54 * * column 10, line 36 - line 46 * * figures 2,3,8,14 *	1-4,7,8, 11	G06F3/147
X A	DE 195 46 786 A (SCHMITZ HORST ;ENGLERT RAINER (DE)) 19 June 1997 * column 4, line 63 - column 5, line 1 * * column 5, line 38 - column 6, line 2 * * column 6, line 10 - line 25 * * figures 1-7 *	1-4,7,8, 11 5,6	
A	GB 2 260 844 A (SONY CORP) 28 April 1993 * page 8, paragraph 1 * * page 8, last paragraph - page 9, paragraph 1 * * page 11, paragraph 2 * * figures 2-4 *	1,5,6	
A	"HOW TO TAKE IN TWICE AS MUCH INFORMATION?" ELECTRONICS WORLD AND WIRELESS WORLD, vol. 102, no. 1723, 1 June 1996, page 452 XP000597327 * the whole document *	1,5,6	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 19 January 1999	Examiner Farricella, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1600 (3.92) (P04011)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 6391

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-01-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5467102 A	14-11-1995	JP 6083779 A	25-03-1994
DE 19546786 A	19-06-1997	NONE	
GB 2260844 A	28-04-1993	JP 5249934 A	28-09-1993

EPO FORM P0448

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)